



KD-HDMI2x4P

KD-HDMI2x4P is Video/Audio HDMI switcher and distribution amplifier with capability of switching and distributing 2 HDMI/HDCP/DVID (up to 1080p) Inputs up to 4 Outputs



Key Benefits

- ✓ Switches and Distributes 2 HDMI/HDCP/DVID inputs up to 4 HDMI outputs
- ✓ Supports Left, Right analog stereo, Coaxial/Digital (PCM) Audio, Toslink Audio
- ✓ Supports any HDMI/HDCP/DVID resolution at 50 Hz and 60 Hz
- ✓ LEDs indicate the selected source and input/output status
- ✓ Flexible EDID (Handshake) Control for any output
- ✓ HDMI connectors
- ✓ Incorporates 6 Key Digital™ Exclusive Technologies
- ✓ Optical IR, Wired IR, RS 232, Front Panel Controls

Key Solutions


- Simultaneously distributes up to 2 HDMI Video/Audio sources to 4 displays
- Supports HDMI cable runs up to 300 ft. (from original source to display) in 480i, 480p, 720p, 1080i resolutions. For HDMI Cable runs above 75 feet, the use of multiple Key Digital™ KD-HDB150 is required for each input and output.
- Can be daisy chained to support up to 100 outputs or displays
- Heat Resistant and able to withstand noisy environments
- Supports 3rd party control systems via RS232 and IR

General Info

- Power: 100VAC to 240VAC, 50Hz and 60Hz, NTSC, PAL
- Rack Mount: Mounting Flanges
- Remote Control: Included
- Enclosure Type: Metal
- Dimensions: 10" x 4.5" x 1.5"
- Shipping Carton Dimensions: 17" x 5.5" x 5"
- Product Weight: 3.5 lbs
- Shipping Weight: 6 lbs

Sports Venue Application

Model: KD-HDMI2x4P

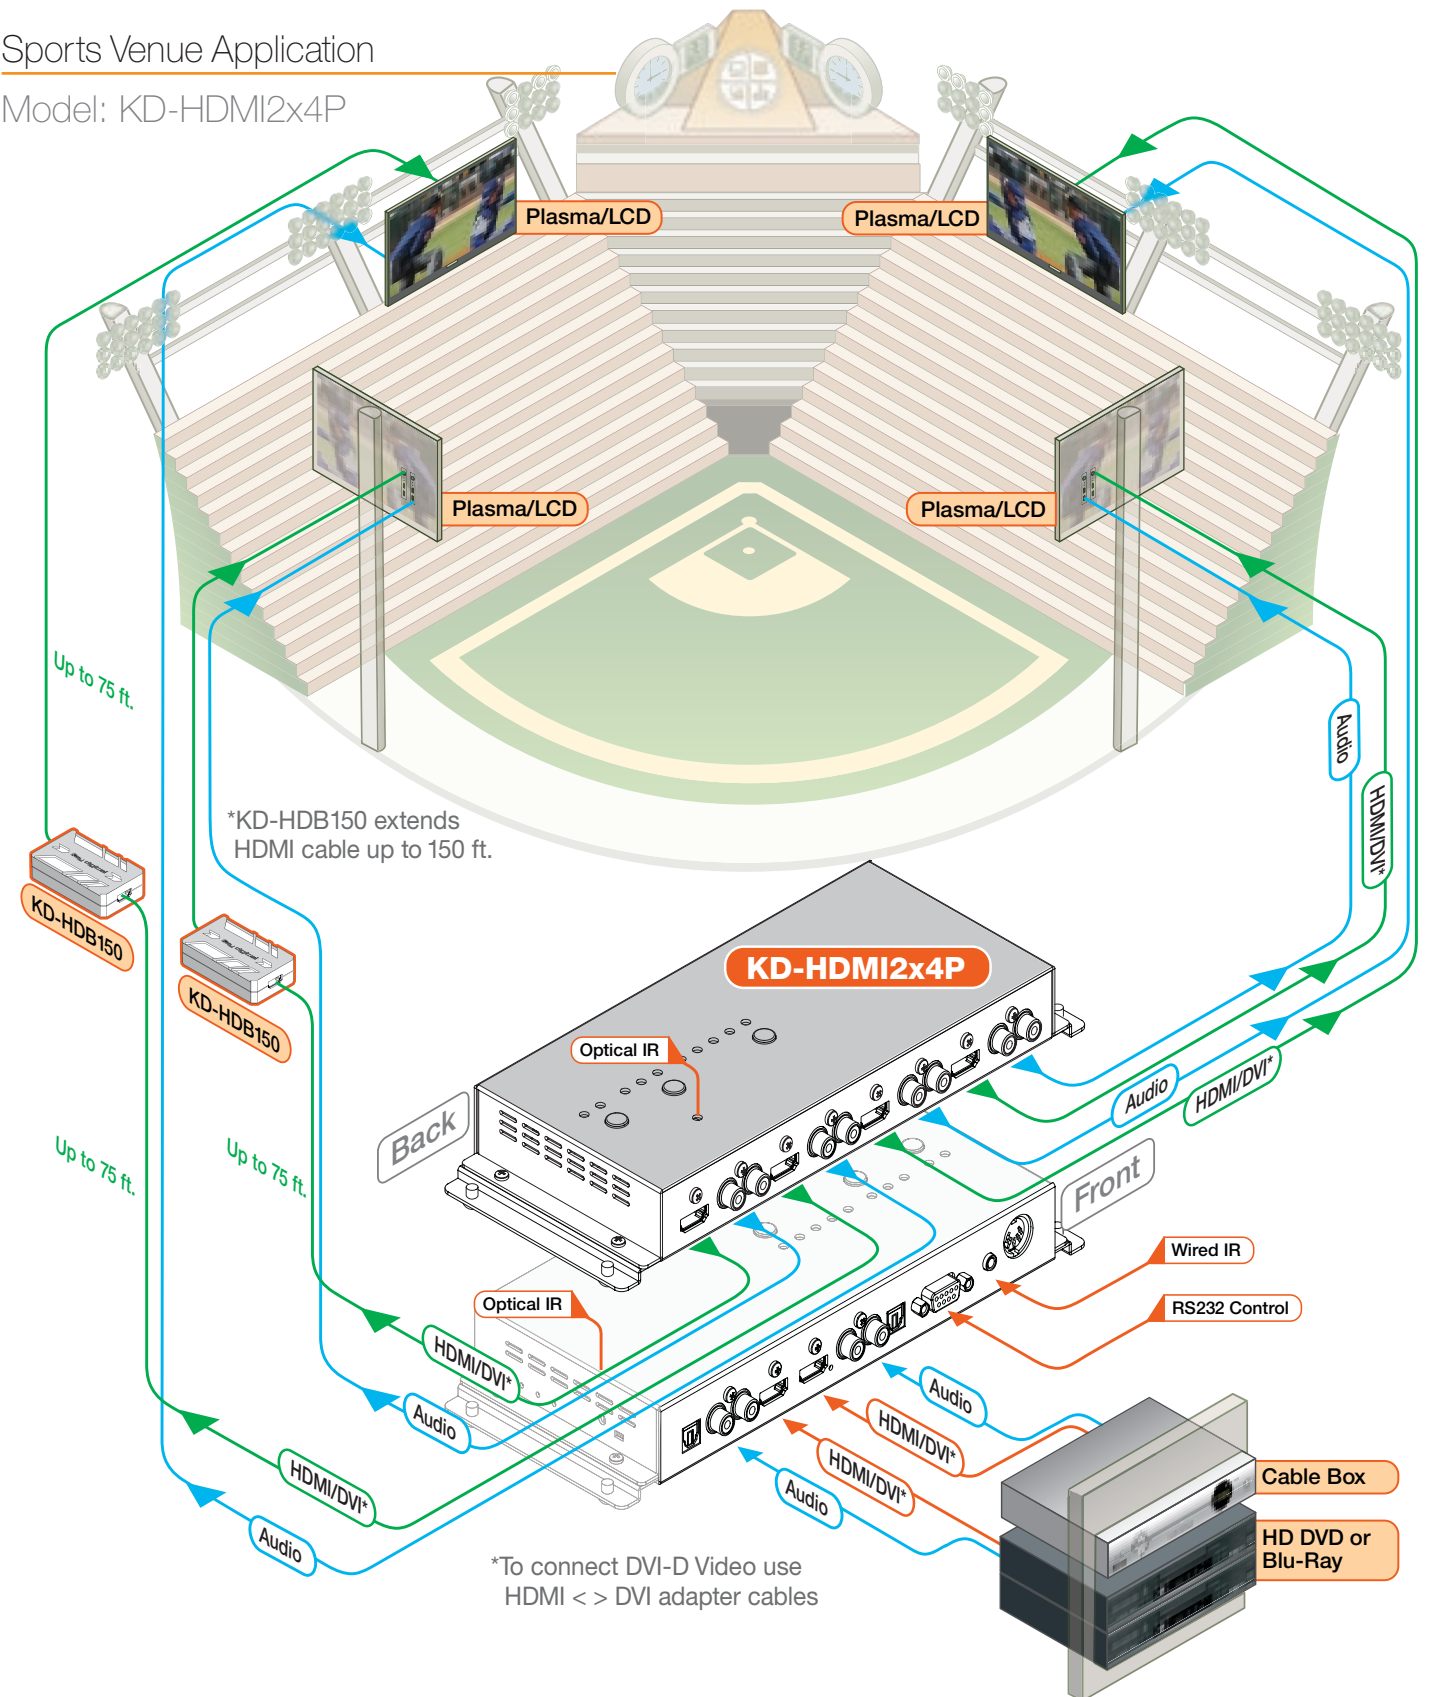

Key Digital® Exclusive Technologies



Supported Technologies

